

ZTA.50.G-Stick

STD-000566-0021

Configured Product

Light Source

SL98

Light Source Size

14mm LES

CCT

3000K

Length

Custom Length

Finish


Matt Black

Dimming

Driver specific

Secondary Lensing Accessories

With accessories

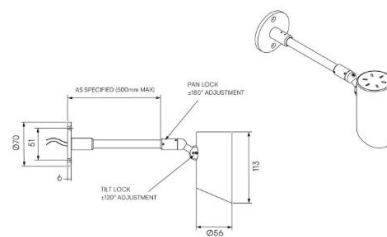

Modular high-performance, surface mounted spotlight system, for interior architectural applications such as Museums, Galleries, Retail and Workplace environments. Engineered for exceptional durability, maintainability, re-manufacturability, and recyclability, this spotlight sets a new standard for sustainable design.

Product Description

ZTA.50.G-Stick is constructed from extruded and precision-machined recycled aluminium, the spotlight features an anodised and powder-coated finish for enhanced durability and aesthetics. Dedicated Wall Wash optic for illuminating graphic displays.

Key Features

- Sustainable construction: made from recycled aluminium with a long-lasting anodised and powder-coated finish. Specialist finishes available on request.
- Stem can be specified to length.
- Versatile adjustment: 363° pan rotation and 130° tilt with a lockable spot.
- High-performance lighting: up to 98 CRI LEDs.
- Customisable accessories: can house up to one lens accessory and various attachments.

Compliance



Technical

Supply	Remote constant current LED driver required
Light source	14mm LES COB
Initial output	SL90 11.7W 33.4Vf at 350mA 2700K · 1865lm · 159lm/W 3000K · 1953lm · 167lm/W 3500K · 1975lm · 169lm/W 4000K · 1963lm · 168lm/W
	SL98 13W 32.4Vf at 400mA 2400K · 1392lm · 107lm/W 2700K · 1573lm · 121lm/W 3000K · 1680lm · 130lm/W 3500K · 1714lm · 132lm/W 4000K · 1764lm · 136lm/W
Light distribution	Wall Wash 66.3° x 40.7°
Lumen maintenance	L90 B0 in excess of 94,000 hours
Colour consistency	2 SDCM
IP rating	IP20
Weight	0.5kg

Service Commitment

