

## ZTA.50.LV Track.Zoom

STD-000569-0013

### Configured Product

Light Source

SL90

Light Source Size

6mm LES

CCT

2700K

Finish

Matt Black

Track adaptor colour

White

Dimming


DALI

Attachments

None

Secondary Lensing Accessories

Without accessories

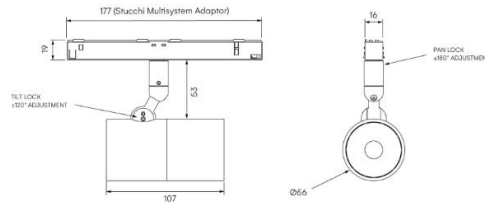

Modular high-performance, mains track-mounted spotlight system, for interior architectural applications such as Museums, Galleries, Retail and Workplace environments. Engineered for exceptional durability, maintainability, re-manufacturability, and recyclability, this spotlight sets a new standard for sustainable design.

## Product Description

ZTA.50.Mains Track.Zoom is constructed from extruded and precision-machined recycled aluminium, the spotlight features an anodised and powder-coated finish for enhanced durability and aesthetics. Easily interchangeable between fixed optic, Wall Wash and Framing projector options.

## Key Features

- Sustainable construction: made from recycled aluminium with a long-lasting anodised and powder-coated finish. Specialist finishes available on request.
- Zoom optics can be easily swapped to Fixed, Wall Wash and additional framer attachments.
- Versatile adjustment: 363° pan rotation and 130° tilt with a lockable spot.
- Broad compatibility: 3-circuit adaptor supports multiple track systems (Stucchi, Eutrac, Global Pulse).
- Advanced dimming options: On-board, DALI, 0-10V, and Wireless dimming, down to 0.1%.
- High-performance lighting: Up to 98 CRI LEDs with interchangeable optical systems.
- Customisable accessories: can house up to one lens accessory and various attachments.
- Ceiling mounting only: designed exclusively for ceiling installations.



**STOANE LIGHTING**

EQUIPMENT DESIGN + MANUFACTURE

ZTA.50.LV Track.Zoom

STD-000569-0013

Compliance



## Technical

**Supply** 48V supply to Stucchi Multisystem EVO track

**Light source** 6mm LES COB

**Initial output** **SL90** 8W 32Vf at 250mA  
2700K · 1087lm · 136lm/W  
3000K · 1133lm · 141lm/W  
3500K · 1144lm · 143lm/W  
4000K · 1175lm · 147lm/W

**SL98** 8.6W 34.4Vf at  
250mA  
2700K · 863lm · 100lm/W  
3000K · 923lm · 107lm/W  
3500K · 923lm · 107lm/W  
4000K · 974lm · 113lm/W

**Light distribution** Zoom 13.7° - 48.1°

**Lumen maintenance** L90 B0 in excess of 94,000 hours

**Colour consistency** 2 SDCM

**IP rating** IP20

**Weight** 0.45kg

## Service Commitment

