

## ZTA.50.LV Track.Zoom

STD-000569-0016

### Configured Product

Light Source

SL98

Light Source Size

6mm LES

CCT

3000K

Finish

Custom Painted

Track adaptor colour

White

Dimming


Xicato Wireless

Attachments

None

Secondary Lensing Accessories

With accessories

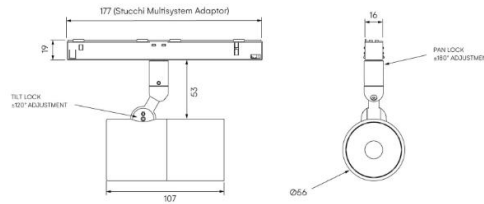

Modular high-performance, mains track-mounted spotlight system, for interior architectural applications such as Museums, Galleries, Retail and Workplace environments. Engineered for exceptional durability, maintainability, re-manufacturability, and recyclability, this spotlight sets a new standard for sustainable design.

## Product Description

ZTA.50.Mains Track.Zoom is constructed from extruded and precision-machined recycled aluminium, the spotlight features an anodised and powder-coated finish for enhanced durability and aesthetics. Easily interchangeable between fixed optic, Wall Wash and Framing projector options.

## Key Features

- Sustainable construction: made from recycled aluminium with a long-lasting anodised and powder-coated finish. Specialist finishes available on request.
- Zoom optics can be easily swapped to Fixed, Wall Wash and additional framer attachments.
- Versatile adjustment: 363° pan rotation and 130° tilt with a lockable spot.
- Broad compatibility: 3-circuit adaptor supports multiple track systems (Stucchi, Eutrac, Global Pulse).
- Advanced dimming options: On-board, DALI, 0-10V, and Wireless dimming, down to 0.1%.
- High-performance lighting: Up to 98 CRI LEDs with interchangeable optical systems.
- Customisable accessories: can house up to one lens accessory and various attachments.
- Ceiling mounting only: designed exclusively for ceiling installations.



**STOANE LIGHTING**

EQUIPMENT DESIGN + MANUFACTURE

ZTA.50.LV Track.Zoom

STD-000569-0016

Compliance



# Technical

**Supply** 48V supply to Stucchi Multisystem EVO track

**Light source** 6mm LES COB

**Initial output** **SL90** 8W 32Vf at 250mA  
2700K · 1087lm · 136lm/W  
3000K · 1133lm · 141lm/W  
3500K · 1144lm · 143lm/W  
4000K · 1175lm · 147lm/W

**SL98** 8.6W 34.4Vf at  
250mA

2700K · 863lm · 100lm/W  
3000K · 923lm · 107lm/W  
3500K · 923lm · 107lm/W  
4000K · 974lm · 113lm/W

**Light distribution** Zoom 13.7° - 48.1°

**Lumen maintenance** L90 B0 in excess of 94,000 hours

**Colour consistency** 2 SDCM

**IP rating** IP20

**Weight** 0.45kg

## Service Commitment

