STOANE
LIGHTING

ZTA.50.LV Track.Zoom

STD-000569-0023

Configured Product

Light Source

SL98

Light Source Size

6mm LES

CCT

3000K

Beam

Zoom 13.7° to 48.1°

Finish

RAL 9010 Pure White

Track adaptor colour

White

Dimming

DALI

Attachments

None

Secondary Lensing Accessories


Without accessories

STOANE LIGHTING

ZTA.50.LV Track.Zoom

STD-000569-0023



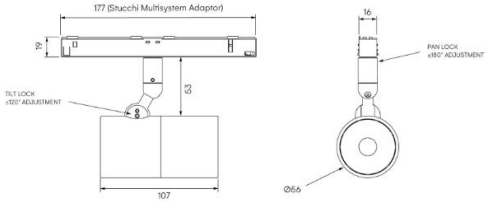

Modular high-performance, mains track-mounted spotlight system, for interior architectural applications such as Museums, Galleries, Retail and Workplace environments. Engineered for exceptional durability, maintainability, re-manufacturability, and recyclability, this spotlight sets a new standard for sustainable design.

Product Description

ZTA.50.Mains Track.Zoom is constructed from extruded and precision-machined recycled aluminium, the spotlight features an anodised and powder-coated finish for enhanced durability and aesthetics. Easily interchangeable between fixed optic, Wall Wash and Framing projector options.

Key Features

• Sustainable construction: made from recycled aluminium with a long-lasting anodised and powder-coated finish. Specialist finishes available on request.
• Zoom optics can be easily swapped to Fixed, Wall Wash and additional framer attachments.
• Versatile adjustment: 363° pan rotation and 130° tilt with a lockable spot.
• Broad compatibility: 3-circuit adapter supports multiple track systems (Stucchi, Eutrac, Global Pulse).
• Advanced dimming options: On-board, DALI, 0-10V, and Wireless dimming, down to 0.1%.
• High-performance lighting: Up to 98 CRI LEDs with interchangeable optical systems.
• Customisable accessories: can house up to one lens accessory and various attachments.
• Ceiling mounting only: designed exclusively for ceiling installations.



STOANE
LIGHTING

ZTA.50.LV Track.Zoom

STD-000569-0023

Compliance

UK CA CE

c ETL US LISTED
Intertek

STOANE LIGHTING

ZTA.50.LV Track.Zoom

STD-000569-0023

Technical

Supply	48V supply to Stucchi Multisystem EVO track
Light source	6mm LES COB
Initial output	**SL90** 8W 32Vf at 250mA 2700K · 1087lm · 136lm/W 3000K · 1133lm · 141lm/W 3500K · 1144lm · 143lm/W 4000K · 1175lm · 147lm/W **SL98** 8.6W 34.4Vf at 250mA 2400K · 733lm · 85lm/W 2700K · 863lm · 100lm/W 3000K · 923lm · 107lm/W 3500K · 923lm · 107lm/W 4000K · 974lm · 113lm/W
Light distribution	**Zoom** 13.7° – 48.1°
Lumen maintenance	L90 B0 in excess of 94,000 hours
Colour consistency	2 SDCM
IP rating	IP20
Weight	0.45kg

STOANE
LIGHTING

ZTA.50.LV Track.Zoom

STD-000569-0023

Service Commitment



