STOANE
LIGHTING

# ZTA.50.Mains Track

STD-000571-0154

## Configured Product

Light Source

SL98

Light Source Size

9mm LES

CCT

3000K

Beam

Custom

Finish

RAL 9010 Pure White

Track adaptor colour

White

Dimming

DALI

Attachments

None

Secondary Lensing Accessories


Without accessories

STOANE LIGHTING

# ZTA.50.Mains Track

STD-000571-0154



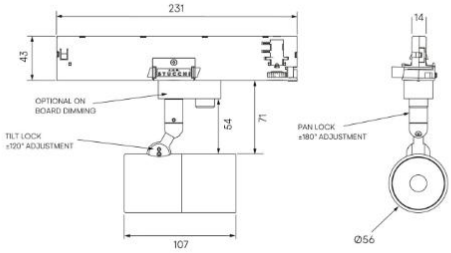


Modular high-performance, mains track-mounted spotlight system, for interior architectural applications such as Museums, Galleries, Retail and Workplace environments. Engineered for exceptional durability, maintainability, re-manufacturability, and recyclability, this spotlight sets a new standard for sustainable design.

**Product Description**

ZTA.50.Mains Track is constructed from extruded and precision-machined recycled aluminium, the spotlight features an anodised and powder-coated finish for enhanced durability and aesthetics. Easily interchangeable between fixed optic, Wall Wash, Zoom and Framing projector options.

**Key Features**

• Sustainable construction: made from recycled aluminium with a long-lasting anodised and powder-coated finish. Specialist finishes available on request.
• Fixed optics can be easily swapped to Zoom, Wall Wash and additional framer attachments.
• Versatile Adjustment: 363° pan rotation and 130° tilt with a lockable spot.
• Broad compatibility: 3-circuit adapter supports multiple track systems (Stucchi, Eutrac, Global Pulse).
• Advanced dimming options: On-board, DALI, 0-10V, and Wireless dimming, down to 0.1%.
• High-performance lighting: Up to 98 CRI LEDs with interchangeable optical systems.
• Customisable accessories: Can house up to two lens accessories and various attachments.
• Ceiling mounting only: Designed exclusively for ceiling installations.







STOANE
LIGHTING

# ZTA.50.Mains Track

STD-000571-0154

## Compliance

STOANE LIGHTING

# ZTA.50.Mains Track

STD-000571-0154

## Technical

| | | | |
|---|---|---|---|
| **Supply** | 230V/240V via 3 circuit track | | |
| **Light source** | 4mm LES COB | 6mm LES COB | 9mm LES COB |
| **Initial output** | **SL90** 8.8W 35.1Vf at 250mA<br>2700K · 972lm · 111lm/W<br>3000K · 1013lm · 115lm/W<br>3500K · 1023lm · 116lm/W<br>4000K · 1051lm · 120lm/W | **SL90** 8W 32Vf at 250mA<br>2700K · 1087lm · 136lm/W<br>3000K · 1133lm · 141lm/W<br>3500K · 1144lm · 143lm/W<br>4000K · 1175lm · 147lm/W | **SL90** 11.8W 33.8Vf at 350mA<br>2700K · 1822lm · 154lm/W<br>3000K · 1908lm · 161lm/W<br>3500K · 1929lm · 163lm/W<br>4000K · 1919lm · 162lm/W |
| | **SL98** 4.3W 17.2Vf at 250mA<br>2400K · 355lm · 83lm/W<br>2700K · 418lm · 97lm/W<br>3000K · 446lm · 104lm/W<br>3500K · 446lm · 104lm/W<br>4000K · 471lm · 110lm/W | **SL98** 8.6W 34.4Vf at 250mA<br>2400K · 733lm · 85lm/W<br>2700K · 863lm · 100lm/W<br>3000K · 923lm · 107lm/W<br>3500K · 923lm · 107lm/W<br>4000K · 974lm · 113lm/W | **SL98** 10.6W 30.4Vf at 350mA<br>2400K · 1085lm · 102lm/W<br>2700K · 1205lm · 113lm/W<br>3000K · 1288lm · 121lm/W<br>3500K · 1313lm · 124lm/W<br>4000K · 1352lm · 127lm/W |
| **Light distribution** | Very Narrow 8.8°<br>Narrow 11°<br>Medium 24.2°<br>Flood 39.7°<br>Wide Flood 49.4° | Very Narrow 13.9°<br>Narrow 14.7°<br>Medium 24.1°<br>Flood 36.7°<br>Wide Flood 51.7° | Narrow 17.4°<br>Narrow 2 18.8°<br>Medium 25.3°<br>Flood 34.1°<br>Wide Flood 46.6° |
| **Lumen maintenance** | L90 B0 in excess of 94,000 hours | | |
| **Colour consistency** | 2 SDCM | | |
| **IP rating** | IP20 | | |
| **Weight** | 0.5kg | | |

STOANE
LIGHTING

# ZTA.50.Mains Track

STD-000571-0154

## Service Commitment

