

ZTA.50.Mains Track

STD-000571-0181

Configured Product

Light Source

SL98

Light Source Size

6mm LES

CCT

2700K

Beam

Flood 36.7°

Finish

RAL 9010 Pure White

Track adaptor colour

White

Dimming


Local Dim

Attachments

None

Secondary Lensing Accessories

Without accessories

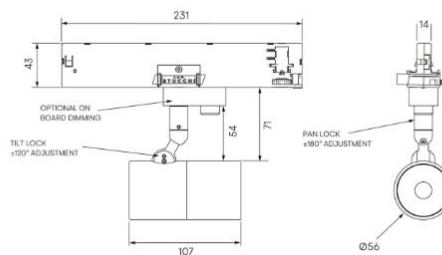


Modular high-performance, mains track-mounted spotlight system, for interior architectural applications such as Museums, Galleries, Retail and Workplace environments. Engineered for exceptional durability, maintainability, re-manufacturability, and recyclability, this spotlight sets a new standard for sustainable design.

Product Description

ZTA.50.Mains Track is constructed from extruded and precision-machined recycled aluminium, the spotlight features an anodised and powder-coated finish for enhanced durability and aesthetics. Easily interchangeable between fixed optic, Wall Wash, Zoom and Framing projector options.

Key Features

- Sustainable construction: made from recycled aluminium with a long-lasting anodised and powder-coated finish. Specialist finishes available on request.
- Fixed optics can be easily swapped to Zoom, Wall Wash and additional framer attachments.
- Versatile Adjustment: 363° pan rotation and 130° tilt with a lockable spot.
- Broad compatibility: 3-circuit adapter supports multiple track systems (Stucchi, Eutrac, Global Pulse).
- Advanced dimming options: On-board, DALI, 0-10V, and Wireless dimming, down to 0.1%.
- High-performance lighting: Up to 98 CRI LEDs with interchangeable optical systems.
- Customisable accessories: Can house up to two lens accessories and various attachments.
- Ceiling mounting only: Designed exclusively for ceiling installations.

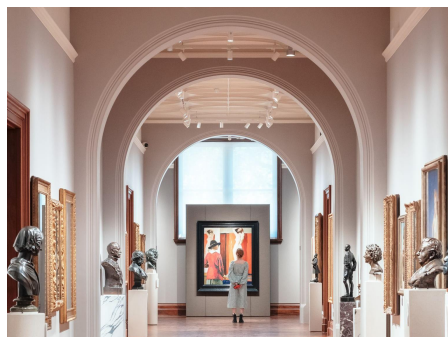

STOANE LIGHTING

EQUIPMENT DESIGN + MANUFACTURE

ZTA.50.Mains Track

STD-000571-0181

Compliance



Technical

Supply	230V/240V via 3 circuit track		
Light source	4mm LES COB	6mm LES COB	9mm LES COB
Initial output	SL90 8.8W 35.1Vf at 250mA	SL90 8W 32Vf at 250mA	SL90 11.8W 33.8Vf at 350mA
	2700K · 972lm · 111lm/W	2700K · 1087lm · 136lm/W	2700K · 1822lm · 154lm/W
	3000K · 1013lm · 115lm/W	3000K · 1133lm · 141lm/W	3000K · 1908lm · 161lm/W
	3500K · 1023lm · 116lm/W	3500K · 1144lm · 143lm/W	3500K · 1929lm · 163lm/W
	4000K · 1051lm · 120lm/W	4000K · 1175lm · 147lm/W	4000K · 1919lm · 162lm/W
	SL98 4.3W 17.2Vf at 250mA	SL98 8.6W 34.4Vf at 250mA	SL98 10.6W 30.4Vf at 350mA
	2400K · 355lm · 83lm/W	2400K · 733lm · 85lm/W	2400K · 1085lm · 102lm/W
	2700K · 418lm · 97lm/W	2700K · 863lm · 100lm/W	2700K · 1205lm · 113lm/W
	3000K · 446lm · 104lm/W	3000K · 923lm · 107lm/W	3000K · 1288lm · 121lm/W
	3500K · 446lm · 104lm/W	3500K · 923lm · 107lm/W	3500K · 1313lm · 124lm/W
Light distribution	4000K · 471lm · 110lm/W	4000K · 974lm · 113lm/W	4000K · 1352lm · 127lm/W
	Very Narrow 8.8°	Very Narrow 13.9°	Narrow 17.4°
	Narrow 11°	Narrow 14.7°	Narrow 2 18.8°
	Medium 24.2°	Medium 24.1°	Medium 25.3°
	Flood 39.7°	Flood 36.7°	Flood 34.1°
	Wide Flood 49.4°	Wide Flood 51.7°	Wide Flood 46.6°
Lumen maintenance	L90 B0 in excess of 94,000 hours		
Colour consistency	2 SDCM		
IP rating	IP20		
Weight	0.5kg		

Service Commitment

