

## ZTA.70.Mains Track

STD-000584-0161

### Configured Product

Light source \_\_\_\_\_

9mm LES

CCT \_\_\_\_\_

3000K

CRI \_\_\_\_\_

SL90

Beam \_\_\_\_\_

Wide Flood 54.1°

Finish \_\_\_\_\_

Matt Black

Track adaptor colour \_\_\_\_\_

Black

Dimming \_\_\_\_\_

DALI

Attachments \_\_\_\_\_

straight/Slash Cut Snoot (specified separately)

Secondary Lensing Accessories \_\_\_\_\_

With accessories

[Environment](#)   [Downloads](#)   [Technical](#)   [Photometry](#)   [Accessories](#)  
[al](#)

## Compliance



## Environmental

### TM65.2

CIBSE's TM65.2 provides a calculation methodology to assess the embodied carbon in lighting products.

ZTA.70 MAINS TRACK

### TM66

CIBSE's TM66 includes a calculator called the Circular Economy Assessment Method (CEAM). An independent metric assessing a luminaire's Circular Economy credentials in terms of product design, materials, manufacturing and ecosystem.

ZTA.70 MAINS TRACK - 2.7

### LCA and EPD

A report containing Life Cycle Assessment results, including environmental impacts across the full life cycle of the product. Impacts cover a wide range of effects on the environment, in addition to carbon emissions.


Please contact the Specifier Support team should your project have a requirement for additional environmental reporting. For more information, please [click here](#).

## Photometry


These files represent the highest available initial output for each light source in 3000K. Lower outputs and other colour temperatures are available.

## Derivatives


We can adapt our fittings to suit your specific needs, here are some examples of what we have done before.



On Board Dimming


**Order no.** On board dim

ZTA.70.Bay Mains Track


**Order no.** ZTA.70.Bay Mains Track

## Accessories and Attachments


This product can accept up to 2 x lenses and louvres:



Honeycomb louvre for glare control

**Order no.** ITY-000392


Soft spread lens to produce a soft elliptical beam

**Order no.** ITY-000430

Sharp spread lens to produce a pronounced elliptical beam

**Order no.** ITY-000431

Diffuser lens used for softening and widening beams

**Order no.** ITY-000429

Clear lens can be used as protection from dirt/debris

**Order no.** ITY-000433

Stipple lens used for softening beams and removing lens artifacts

**Order no.** ITY-000434

This product can accept one of the following attachments:



Removeable barn doors used to crop beams

**Order no.** STD-000302



Removeable straight cut or slash cut snoot.

**Order no.** STD-000612

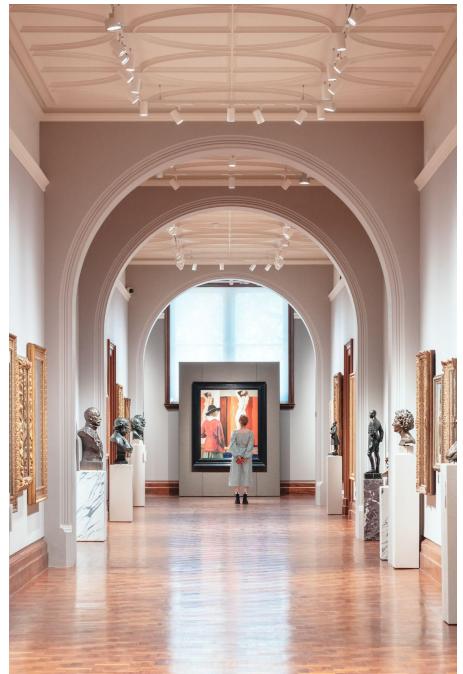
## Related Projects



Young V&A



V&A, Hintze Galleries



National Portrait Gallery

## Service Commitment



## Related Products



ZTA.50.Mains Track



ZTA.35.Surface

ZTA.70.Mains  
Track.Wall Wash

ZTA.70.Surface

[Environmental](#)[Technical](#)[Photometry](#)[Accessories](#)[Back to Top](#)