STOANE
LIGHTING

# ZTA.70.Mains Track

STD-000584-0217

## Configured Product

Light Source

SL98

Light Source Size

14mm LES

CCT

3000K

Beam

Extra Wide Flood 79.6°

Finish

RAL 9010 Pure White

Track adaptor colour

White

Dimming

Custom

Attachments

Barn Doors (specified separately)

Secondary Lensing Accessories


Without accessories

STOANE
LIGHTING

# ZTA.70.Mains Track

STD-000584-0217



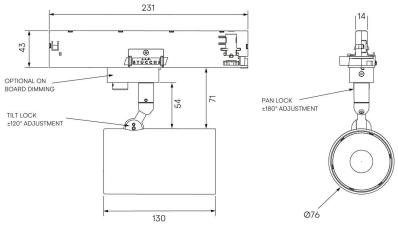


Modular high-performance, mains track-mounted spotlight system, for interior architectural applications such as Museums, Galleries, Retail and Workplace environments.
Engineered for exceptional durability, maintainability, re-manufacturability, and recyclability, this spotlight sets a new standard for sustainable design.

**Product Description**
ZTA.70.Mains Track is constructed from extruded and precision-machined recycled aluminium, the spotlight features an anodised and powder-coated finish for enhanced durability and aesthetics. Compatible with 3-circuit adapters for 120-277V Stucchi, Eutrac, Global Pulse, and other track systems, this spotlight includes integral dimming control gear. The spotlight can accommodate up to two lens accessories and multiple attachments, making it highly customisable for various lighting needs.

**Key Features**
• Sustainable construction: made from recycled aluminium with a long-lasting anodised and powder-coated finish. Specialist finishes available on request.
• Versatile adjustment: 363° pan rotation and 130° tilt with a lockable spot.
• Broad compatibility: 3-circuit adapter supports multiple track systems (Stucchi, Eutrac, Global Pulse).
• Advanced dimming options: on-board, DALI, 0-10V, and Wireless dimming, down to 0.1%.
• High-performance lighting: Up to 98 CRI LEDs with interchangeable optical systems.
• Customisable accessories: can house up to two lens accessories and various attachments.
• Ceiling mounting only: designed exclusively for ceiling installations.


STOANE LIGHTING

# ZTA.70.Mains Track

STD-000584-0217





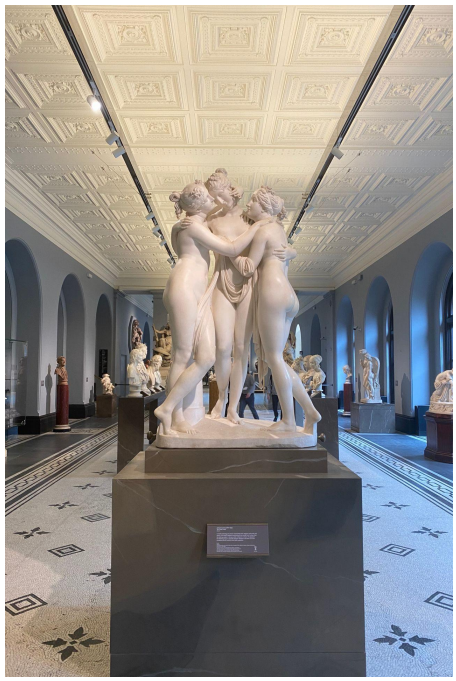

Environmental Downloads Technical Photometry Accessories

## Compliance

STOANE LIGHTING

# ZTA.70.Mains Track

STD-000584-0217

## Environmental

### TM65.2

CIBSE's TM65.2 provides a calculation methodology to assess the embodied carbon in lighting products.

ZTA.70 MAINS TRACK

### TM66

CIBSE's TM66 includes a calculator called the Circular Economy Assessment Method (CEAM). An independent metric assessing a luminaire's Circular Economy credentials in terms of product design, materials, manufacturing and ecosystem.

ZTA.70 MAINS TRACK - 2.7

### LCA and EPD

A report containing Life Cycle Assessment results, including environmental impacts across the full life cycle of the product. Impacts cover a wide range of effects on the environment, in addition to carbon emissions.

Please contact the Specifier Support team should your project have a requirement for additional environmental reporting. For more information, please click here.

## Technical

| | | | |
|---|---|---|---|
| **Supply** | 230V/240V via 3 circuit track | | |
| **Light source** | 6mm LES COB | 9mm LES COB | 14mm LES COB |
| **Initial output** | **SL90** 8W 32Vf at 250mA<br>2700K · 1087lm · 136lm/W | **SL90** 11.8W 33.8Vf at 350mA<br>2700K · 1822lm · 154lm/W | **SL90** 20.9W 34.8Vf at 600mA |

STOANE LIGHTING

# ZTA.70.Mains Track

STD-000584-0217

| | | | |
|---|---|---|---|
| | 3000K • 1133lm • 141lm/W<br>3500K • 1144lm • 143lm/W<br>4000K • 1175lm • 147lm/W<br><br>SL98 8.6W 34.4Vf at 250mA<br><br>2400K • 733lm • 85lm/W<br>2700K • 863lm • 100lm/W<br>3000K • 923lm • 107lm/W<br>3500K • 923lm • 107lm/W<br>4000K • 974lm • 113lm/W | 3000K • 1908lm • 161lm/W<br>3500K • 1929lm • 163lm/W<br>4000K • 1919lm • 162lm/W<br><br>SL98 10.6W 30.4Vf at 350mA<br><br>2400K • 1085lm • 85lm/W<br>2700K • 1205lm • 113lm/W<br>3000K • 1288lm • 121lm/W<br>3500K • 1313lm • 124lm/W<br>4000K • 1352lm • 127lm/W | 2700K • 3097lm • 148lm/W<br>3000K • 3243lm • 155lm/W<br>3500K • 3280lm • 157lm/W<br>4000K • 3261lm • 156lm/W<br><br>SL98 23.5W 33.5Vf at 700mA<br><br>2400K • 2362lm • 101lm/W<br>2700K • 2669lm • 114lm/W<br>3000K • 2852lm • 122lm/W<br>3500K • 2909lm • 124lm/W<br>4000K • 2973lm • 127lm/W |
| **Light distribution** | Very Narrow 7.3°<br>Very Narrow 2 9.6°<br>Narrow 11°<br>Medium 26.7°<br>Flood 36.8°<br>Wide Flood 55.4°<br>Extra Wide Flood 85.4° | Very Narrow 11.1°<br>Narrow 14.4°<br>Narrow 2 15.1°<br>Medium 25.1°<br>Flood 35.1°<br>Wide Flood 54.1°<br>Extra Wide Flood 82.9° | Narrow 16.9°<br>Narrow 2 21.4°<br>Medium 22°<br>Medium 2 24.7°<br>Flood 32.4°<br>Wide Flood 51.6°<br>Extra Wide Flood 79.6° |
| **Lumen maintenance** | L90 B0 in excess of 94,000 hours | | |
| **Colour consistency** | 2 SDCM | | |
| **IP rating** | IP20 | | |
| **Weight** | 0.9kg | | |

## Photometry

These files represent the highest available initial output for each light source in 3000K. Lower outputs and other colour temperatures are available.


STOANE LIGHTING

# ZTA.70.Mains Track

STD-000584-0217


## Derivatives

We can adapt our fittings to suit your specific needs, here are some examples of what we have done before.

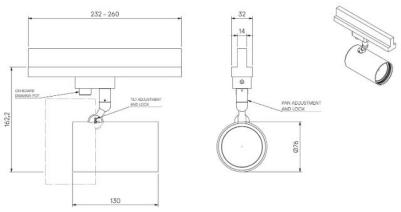

On Board Dimming

**Order no.** On board dim




ZTA.70.Bay Mains Track

**Order no.** ZTA.70.Bay Mains Track


## Accessories and Attachments

This product can accept up to 2 x lenses and louvres:




Honeycomb louvre for glare control

**Order no.** ITY-000392



Soft spread lens to product a soft elliptical beam

**Order no.** ITY-000430




Sharp spread lens to produce a pronounced elliptical beam

**Order no.** ITY-000431




Diffuser lens used for softening and widening beams

**Order no.** ITY-000429



Clear lens can be used as protection from dirt/debris

**Order no.** ITY-000433



Stipple lens used for softening beams and removing lens artifacts

**Order no.** ITY-000434

This product can accept one of the following attachments:

STOANE LIGHTING

# ZTA.70.Mains Track

STD-000584-0217



Removeable barn doors used to crop beams


**Order no.** STD-000302




Removeable straight cut or slash cut snoot.

**Order no.** STD-000612

## Related Projects

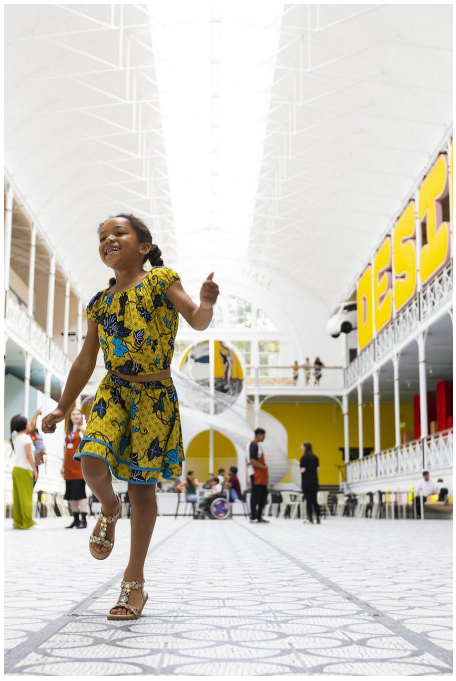

Young V&A

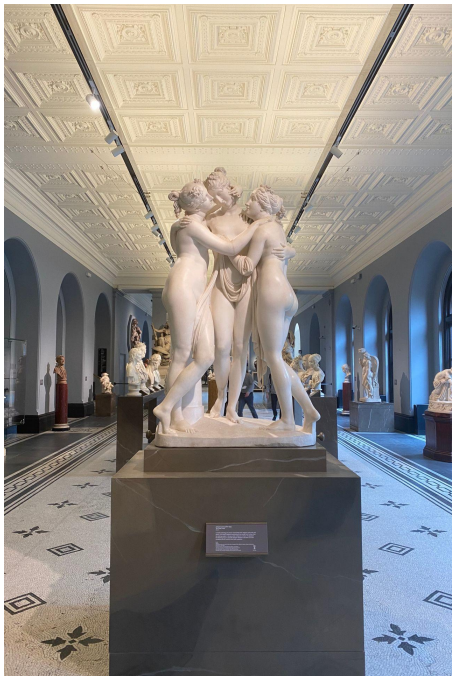

V&A, Hintze Galleries



National Portrait Gallery

STOANE LIGHTING

# ZTA.70.Mains Track

STD-000584-0217

## Service Commitment

ReNew

5 Year Warranty
25 Year Duty of Care

## Related Products



ZTA.50.Mains Track



ZTA.35.Surface



ZTA.70.Mains Track.Wall Wash



ZTA.70.Surface

Environmental Technical Photometry Accessories Back to Top