

ZTA.70.Surface.Wall Wash

STD-000591-0028

Configured Product

Light Source

SL98

CCT

3000K

Supply

Constant Current

Finish

TBC

Dimming

Driver specific

Attachments

Straight/Slash Cut Snoot (specified separately)

Cable route


Through Base

Cable Length

500mm

Secondary Lensing Accessories

With accessories

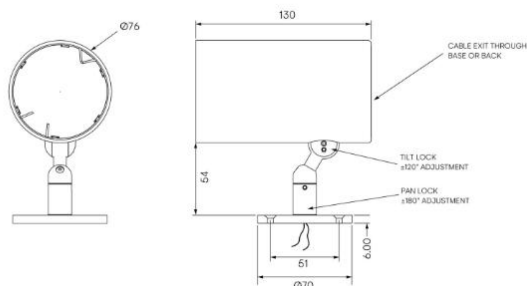

Modular high-performance, surface mounted spotlight system, for interior architectural applications such as Museums, Galleries, Retail and Workplace environments.

Engineered for exceptional durability, maintainability, re-manufacturability, and recyclability, this spotlight sets a new standard for sustainable design.

Product Description

ZTA.70.Surface.Wall Wash is constructed from extruded and precision-machined recycled aluminium, the spotlight features an anodised and powder-coated finish for enhanced durability and aesthetics. The spotlight can accommodate up to two lens accessories and multiple attachments, making it highly customisable for various lighting needs.

Key Features


- **Sustainable Construction:** Made from recycled aluminium with a long-lasting anodised and powder-coated finish. Specialist finishes available on request.
- **Versatile Adjustment:** 363° pan rotation and 130° tilt with a lockable spot.
- **High-Performance Lighting:** Up to 98 CRI LEDs.
- **Customisable Accessories:** Can house up to two lens accessories and various attachments.
- **Advanced dimming options:** DALI, 0-10V, DMX and Wireless dimming, down to 0.1%.

STOANE LIGHTING

EQUIPMENT DESIGN + MANUFACTURE

ZTA.70.Surface.Wall Wash

STD-000591-0028

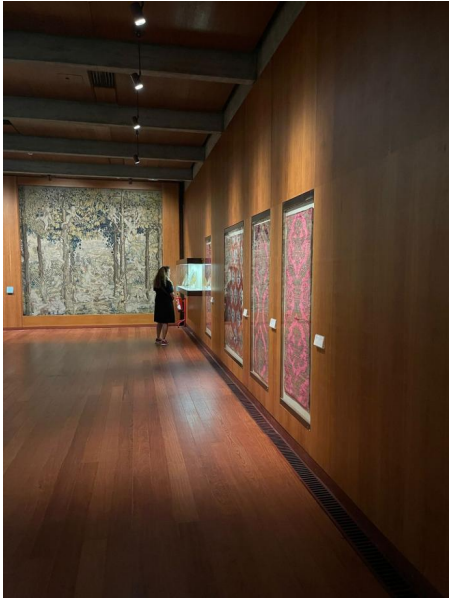

Compliance



Technical

Supply	Remote constant current LED driver required
Light source	14mm LES COB
Initial output	SL90 17.2W 34.3Vf at 500mA 2700K · 2613lm · 152lm/W 3000K · 2736lm · 159lm/W 3500K · 2768lm · 161lm/W 4000K · 2751lm · 160lm/W
	SL98 18.1W 33Vf at 550mA 2400K · 1884lm · 104lm/W 2700K · 2129lm · 118lm/W 3000K · 2274lm · 126lm/W 3500K · 2337lm · 129lm/W 4000K · 2388lm · 132lm/W
Light distribution	Wall Wash 78.1° x 33.2°
Lumen maintenance	L90 B0 in excess of 94,000 hours
Colour consistency	2 SDCM
IP rating	IP20
Weight	0.84kg

Service Commitment

