

## ZTA.50.Surface.Framer

STD-000592-0201

### Configured Product

Light Source

SL98

Light Source Size

9mm LES

CCT

3000K

Supply

Constant Current

Finish

RAL 9003 Signal White

Framer type

Adjustable Beam

Dimming

Driver specific

Cable route

Through Base

Cable Length

500mm

Gobo Holder


Yes (sold separately)

Softening Diffuser/Accessory

# STOANE LIGHTING

EQUIPMENT DESIGN + MANUFACTURE

Yes
-----

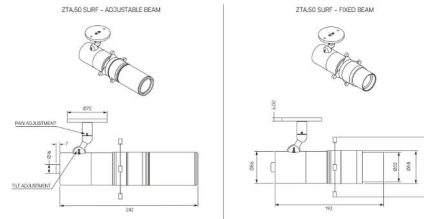

Modular high-performance, surface mounted spotlight system, for interior architectural applications such as Museums, Galleries and Retail. Engineered for exceptional durability, maintainability, re-manufacturability, and recyclability, this spotlight sets a new standard for sustainable design.

## Product Description

ZTA.50.Surface.Framer is constructed from extruded and precision-machined recycled aluminium, the spotlight features an anodised and powder-coated finish for enhanced durability and aesthetics. Easily interchangeable between Framing projector, fixed optic, Wall Wash and Zoom options.

Fixed uses a Wide Flood spread for long throws. Adjustable uses a Zoom lens to allow the user to narrow in on very fine details. Both are capable of holding a gobo.

## Key Features

- Sustainable construction: made from recycled aluminium with a long-lasting anodised and powder-coated finish.
- Framing attachment can be easily swapped to fixed optics, Zoom and Wall Wash.
- The easy-to-adjust fins allow for precision positioning to sharply define light on pieces of artwork.
- Versatile adjustment: 363° pan rotation and 130° tilt with a lockable spot.
- High-performance lighting: up to 98 CRI LEDs with interchangeable optical systems.
- Advanced dimming options: DALI, 0-10V, DMX and Wireless dimming, down to 0.1%.

## Compliance



## Technical

Supply Remote constant current LED driver required

Light source 9mm LES COB

Initial output **SL98** 10.6W 30.4Vf at  
350mA  
2700K · 1205lm · 113lm/W  
3000K · 1288lm · 121lm/W  
3500K · 1313lm · 124lm/W  
4000K · 1352lm · 127lm/W

Light distribution Adjustable 10° to 28.9°  
Fixed 49.3°

Lumen maintenance L90 B0 in excess of 94,000 hours

Colour consistency 2 SDCM

IP rating IP20

Weight 1kg

---

## Service Commitment

