STOANE
LIGHTING

ZTA.50.Surface.Framer

STD-000592-0201

Configured Product

Light Source

SL98

Light Source Size

9mm LES

CCT

3000K

Supply

Constant Current

Finish

RAL 9003 Signal White

Framer type

Adjustable Beam

Dimming

Driver specific

Cable route

Through Base

Cable Length

500mm

Gobo Holder

Yes (sold separately)

Softening Diffuser/Accessory

STOANE
LIGHTING


Yes

STOANE
LIGHTING

ZTA.50.Surface.Framer

STD-000592-0201



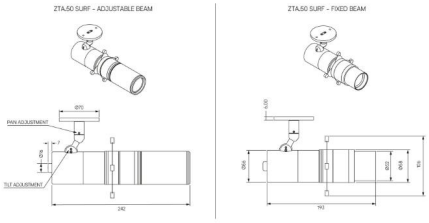

Modular high-performance, surface mounted spotlight system, for interior architectural applications such as Museums, Galleries and Retail. Engineered for exceptional durability, maintainability, re-manufacturability, and recyclability, this spotlight sets a new standard for sustainable design.

Product Description
ZTA.50.Surface.Framer is constructed from extruded and precision-machined recycled aluminium, the spotlight features an anodised and powder-coated finish for enhanced durability and aesthetics. Easily interchangeable between Framing projector, fixed optic, Wall Wash and Zoom options.

Fixed uses a Wide Flood spread for long throws. Adjustable uses a Zoom lens to allow the user to narrow in on very fine details. Both are capable of holding a gobo.

Key Features
• Sustainable construction: made from recycled aluminium with a long-lasting anodised and powder-coated finish.
• Framing attachment can be easily swapped to fixed optics, Zoom and Wall Wash.
• The easy-to-adjust fins allow for precision positioning to sharply define light on pieces of artwork.
• Versatile adjustment: 363° pan rotation and 130° tilt with a lockable spot.
• High-performance lighting: up to 98 CRI LEDs with interchangeable optical systems.
• Advanced dimming options: DALI, 0-10V, DMX and Wireless dimming, down to 0.1%.

Compliance

UK CA CE

C ETL LISTED US
Intertek

Technical

STOANE LIGHTING

ZTA.50.Surface.Framer

STD-000592-0201

Supply	Remote constant current LED driver required
Light source	9mm LES COB
Initial output	**SL98** 10.6W 30.4Vf at 350mA 2400K • 1085lm • 102lm/W 2700K • 1205lm • 113lm/W 3000K • 1288lm • 121lm/W 3500K • 1313lm • 124lm/W 4000K • 1352lm • 127lm/W

SL90 11.8W 33.8Vf at 350mA 2700K • 1822lm • 154lm/W 3000K • 1908lm • 161lm/W 3500K • 1929lm • 163lm/W 4000K • 1919lm • 162l

STOANE LIGHTING

ZTA.50.Surface.Framer

STD-000592-0201

m/
W

Light distribution	Adjustable 10° to 28.9° Fixed 49.3°
Lumen maintenance	L90 B0 in excess of 94,000 hours
Colour consistency	2 SDCM
IP rating	IP20
Weight	1kg

Service Commitment

ReNew

5 Year Warranty
25 Year Duty of Care