

ZTA.50.Surface.Framer

STD-000592-0206

Configured Product

Light Source

SL98

Light Source Size

9mm LES

CCT

2700K

Supply

Constant Current

Finish

RAL 9003 Signal White

Framer type

Adjustable Beam

Dimming

Driver specific

Cable route

TBC

Cable Length

500mm

Gobo Holder


No

Softening Diffuser/Accessory

STOANE LIGHTING

EQUIPMENT DESIGN + MANUFACTURE

Yes

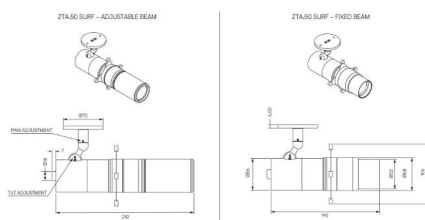

Modular high-performance, surface mounted spotlight system, for interior architectural applications such as Museums, Galleries and Retail. Engineered for exceptional durability, maintainability, re-manufacturability, and recyclability, this spotlight sets a new standard for sustainable design.

Product Description

ZTA.50.Surface.Framer is constructed from extruded and precision-machined recycled aluminium, the spotlight features an anodised and powder-coated finish for enhanced durability and aesthetics. Easily interchangeable between Framing projector, fixed optic, Wall Wash and Zoom options.

Fixed uses a Wide Flood spread for long throws. Adjustable uses a Zoom lens to allow the user to narrow in on very fine details. Both are capable of holding a gobo.

Key Features

- Sustainable construction: made from recycled aluminium with a long-lasting anodised and powder-coated finish.
- Framing attachment can be easily swapped to fixed optics, Zoom and Wall Wash.
- The easy-to-adjust fins allow for precision positioning to sharply define light on pieces of artwork.
- Versatile adjustment: 363° pan rotation and 130° tilt with a lockable spot.
- High-performance lighting: up to 98 CRI LEDs with interchangeable optical systems.
- Advanced dimming options: DALI, 0-10V, DMX and Wireless dimming, down to 0.1%.

Compliance



Technical

Supply

Remote constant current LED driver required

Light source

9mm LES COB

Initial output

SL9 SL98 10.6W 30.4Vf at
0 11. 350mA
8W 2400K · 1085lm ·
33.8 102lm/W
Vf at 2700K · 1205lm ·
350 113lm/W
mA 3000K · 1288lm ·
270 121lm/W
0K · 3500K · 1313lm ·
1822 124lm/W
lm · 4000K · 1352lm ·
154l 127lm/W
m/
W
300
0K ·
1908
lm ·
161l
m/
W
350
0K ·
1929
lm ·
163l
m/
W
400
0K
m · 1
919l
m · 1
62l

	m/ W
Light distribution	Adjustable 10° to 28.9° Fixed 49.3°
Lumen maintenance	L90 B0 in excess of 94,000 hours
Colour consistency	2 SDCM
IP rating	IP20
Weight	1kg

Service Commitment

