STOANE
LIGHTING

ZTA.35.LV.Track.Framer

STD-000596-0017

Configured Product

Light Source

SL90

Light Source Size

4mm LES

CCT

3000K

Finish

RAL 9003 Signal White

Track adaptor colour

White

Dimming

0-10V

Gobo Holder

No

Softening Diffuser/Accessory

No

Framer Type


Adjustable Beam

STOANE
LIGHTING

ZTA.35.LV.Track.Framer

STD-000596-0017



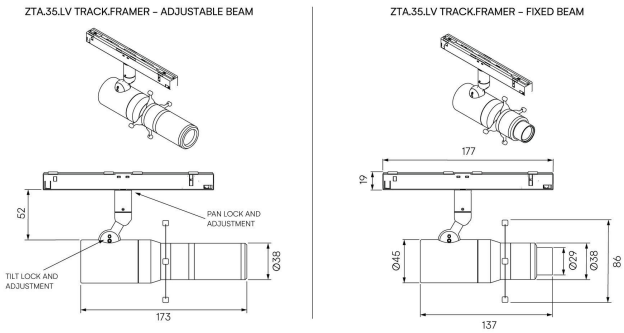

Modular high-performance, low voltage track-mounted spotlight system, for interior architectural applications such as Museums, Galleries, Retail and Workplace environments. Engineered for exceptional durability, maintainability, re-manufacturability, and recyclability, this spotlight sets a new standard for sustainable design.

Easily interchangeable between fixed, Zoom optics and Framer attachments.

Product Description

ZTA.35.LV Track.Framer is constructed from extruded and precision-machined recycled aluminium, the spotlight features an anodised and powder-coated finish for enhanced durability and aesthetics. Compatible with 48V Stucchi Multisystem EVO track , this spotlight includes integral dimming control gear.

Fixed uses a Wide Flood spread for long throws. Adjustable uses a Zoom lens to allow the user to narrow in on very fine details. Both are capable of holding a gobo.

Key Features

• Sustainable construction: made from recycled aluminium with a long-lasting anodised and powder-coated finish.
• Framing attachment can be easily swapped to fixed optics, Zoom and Wall Wash.
• The easy-to-adjust fins allow for precision positioning to sharply define light on pieces of artwork.
• Versatile adjustment: 363° pan rotation and 130° tilt with a lockable spot.
• High-performance lighting: up to 98 CRI LEDs with interchangeable optical systems.
• Advanced dimming options: DALI, 0-10V, DMX and Wireless dimming, down to 0.1%.

Compliance

UK CA CE

STOANE LIGHTING

ZTA.35.LV.Track.Framer

STD-000596-0017

Technical

Supply	230V/240V via 3 circuit track	
Light source	4mm LES COB	6mm LES COB
Initial output	**SL98** 4.3W 17.2Vf at 250mA	**SL98** 8.6W 34.4Vf at 250mA
	2400K · 355lm · 83lm/W 2700K · 418lm · 97lm/W 3000K · 446lm · 104lm/W 3500K · 446lm · 104lm/W 4000K · 471lm · 110lm/W	2400K · 733lm · 85lm/W 2700K · 863lm · 100lm/W 3000K · 923lm · 107lm/W 3500K · 923lm · 107lm/W 4000K · 974lm · 113lm/W
Light distribution	Adjustable 15.7° - 32.5° Fixed 50.2°	Adjustable 15.6° - 31.7° Fixed 50°
Lumen maintenance	L90 B0 in excess of 94,000 hours	
Colour consistency	2 SDCM	
IP rating	IP20	
Weight	0.53kg	

Service Commitment

ReNew

5 Year Warranty
25 Year Duty of Care