STOANE
LIGHTING

# ZTA.35.LV.Track.Framer

STD-000596-0023

## Configured Product

Light Source

SL90

Light Source Size

6mm LES

CCT

3000K

Finish

RAL 9003 Signal White

Track adaptor colour

White

Dimming

N/A

Gobo Holder

No

Softening Diffuser/Accessory

Yes

Framer Type


Adjustable Beam

STOANE
LIGHTING

# ZTA.35.LV.Track.Framer

STD-000596-0023



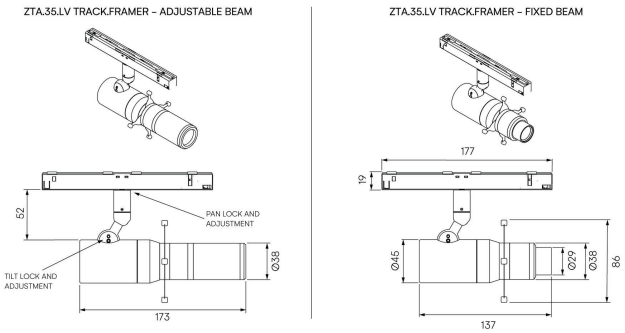


Modular high-performance, low voltage track-mounted spotlight system, for interior architectural applications such as Museums, Galleries, Retail and Workplace environments. Engineered for exceptional durability, maintainability, re-manufacturability, and recyclability, this spotlight sets a new standard for sustainable design.

Easily interchangeable between fixed, Zoom optics and Framer attachments.

**Product Description**

ZTA.35.LV Track.Framer is constructed from extruded and precision-machined recycled aluminium, the spotlight features an anodised and powder-coated finish for enhanced durability and aesthetics.  Compatible with 48V Stucchi Multisystem EVO track , this spotlight includes integral dimming control gear.

Fixed uses a Wide Flood spread for long throws. Adjustable uses a Zoom lens to allow the user to narrow in on very fine details. Both are capable of holding a gobo.

**Key Features**

- Sustainable construction: made from recycled aluminium with a long-lasting anodised and powder-coated finish.
- Framing attachment can be easily swapped to fixed optics, Zoom and Wall Wash.
- The easy-to-adjust fins allow for precision positioning to sharply define light on pieces of artwork.
- Versatile adjustment: 363° pan rotation and 130° tilt with a lockable spot.
- High-performance lighting: up to 98 CRI LEDs with interchangeable optical systems.
- Advanced dimming options: DALI, 0-10V, DMX and Wireless dimming, down to 0.1%.

## Compliance

UK CA CE

STOANE LIGHTING

# ZTA.35.LV.Track.Framer

STD-000596-0023

## Technical

| | | |
|---|---|---|
| **Supply** | 230V/240V via 3 circuit track | |
| **Light source** | 4mm LES COB | 6mm LES COB |
| **Initial output** | **SL98** 4.3W 17.2Vf at 250mA | **SL98** 8.6W 34.4Vf at 250mA |
| | 2400K · 355lm · 83lm/W<br>2700K · 418lm · 97lm/W<br>3000K · 446lm · 104lm/W<br>3500K · 446lm · 104lm/W<br>4000K · 471lm · 110lm/W | 2400K · 733lm · 85lm/W<br>2700K · 863lm · 100lm/W<br>3000K · 923lm · 107lm/W<br>3500K · 923lm · 107lm/W<br>4000K · 974lm · 113lm/W |
| **Light distribution** | Adjustable 15.7° - 32.5°<br>Fixed 50.2° | Adjustable 15.6° - 31.7°<br>Fixed 50° |
| **Lumen maintenance** | L90 B0 in excess of 94,000 hours | |
| **Colour consistency** | 2 SDCM | |
| **IP rating** | IP20 | |
| **Weight** | 0.53kg | |

## Service Commitment

ReNew

5 Year Warranty
25 Year Duty of Care