

## VCL.Clamp

STD-000598-0009

### Configured Product

Light Source

SL90

CCT

2700K

Length


571.2mm

Finish

Anodised Clear

Dimming

Local Dim + Wireless

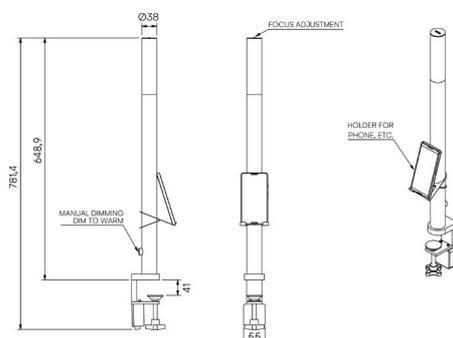

Flexible and portable task lighting system, designed to enhance the workspace in home working and office environments.

## Product Description

The Video Conferencing Light has been designed and developed to address good quality task lighting for the home working and office environment. VCL.Clamp has a high quality glass base by which a device can rest in the dedicated groove. It is available in a choice of finishes, and some elements can be customised such as height and dimming. Includes toughened glass diffuser with adjustable kick reflector for soft distribution of light.

## Key Features

- Optional phone cradle.
- Desktop and clamp versions available.
- Adjustable kick reflector to allow easy of adjustment of light effect from work surface to wall/ face during video conferencing.
- Sustainable construction: made from recycled aluminium with a long-lasting anodised finish. Specialist finishes such as stainless steel anodised effect or RAL finishes available on request.
- Advanced dimming options: On-board and Wireless dimming, down to 0.1%.

## Compliance



## Technical

Supply Remote constant current LED driver required

Light source 9mm LES COB

Initial output **SL90** 11.8W 33.8Vf at 350mA

2700K · 1822lm · 154lm/W

3000K · 1908lm · 161lm/W

3500K · 1929lm · 163lm/W

4000K · 1919lm · 162lm/W

**SL98** 10.6W 30.4Vf at

350mA

2700K · 1205lm · 113lm/W

3000K · 1288lm · 121lm/W

3500K · 1313lm · 124lm/W

4000K · 1352lm · 127lm/W

Light distribution Even distribution 146.4°  
Full tilt distribution 172.1°  
Half tilt distribution 208.3°

Lumen maintenance L90 B0 in excess of 94,000 hours

Colour consistency 2 SDCM

Colour maintenance  $\pm 0.007 \Delta u'v'$

IP rating IP20

Weight 1.44kg

## Service Commitment

