

VCL.Clamp

STD-000598-0010

Configured Product

Light Source

SL90

CCT

TBC

Length


Standard Length

Finish

Anodised Clear

Dimming

Local Dim

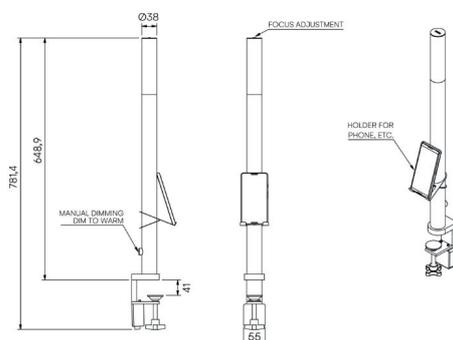

Flexible and portable task lighting system, designed to enhance the workspace in home working and office environments.

Product Description

The Video Conferencing Light has been designed and developed to address good quality task lighting for the home working and office environment. VCL.Clamp has a high quality glass base by which a device can rest in the dedicated groove. It is available in a choice of finishes, and some elements can be customised such as height and dimming. Includes toughened glass diffuser with adjustable kick reflector for soft distribution of light.

Key Features

- Optional phone cradle.
- Desktop and clamp versions available.
- Adjustable kick reflector to allow easy of adjustment of light effect from work surface to wall/ face during video conferencing.
- Sustainable construction: made from recycled aluminium with a long-lasting anodised finish. Specialist finishes such as stainless steel anodised effect or RAL finishes available on request.
- Advanced dimming options: On-board and Wireless dimming, down to 0.1%.

Compliance



Technical

Supply Remote constant current LED driver required

Light source 9mm LES COB

Initial output **SL90** 11.8W 33.8Vf at 350mA

2700K · 1822lm · 154lm/W

3000K · 1908lm · 161lm/W

3500K · 1929lm · 163lm/W

4000K · 1919lm · 162lm/W

SL98 10.6W 30.4Vf at

350mA

2700K · 1205lm · 113lm/W

3000K · 1288lm · 121lm/W

3500K · 1313lm · 124lm/W

4000K · 1352lm · 127lm/W

Light distribution Even distribution 146.4°
Full tilt distribution 172.1°
Half tilt distribution 208.3°

Lumen maintenance L90 B0 in excess of 94,000 hours

Colour consistency 2 SDCM

Colour maintenance $\pm 0.007 \Delta u'v'$

IP rating IP20

Weight 1.44kg

Service Commitment

