STOANE
LIGHTING

Micro G-Cat

STD-000618-0001

Configured Product

CCT

2200K

Finish

Matt Black

Caterary Wire Diameter


4mm

STOANE LIGHTING

Micro G-Cat

STD-000618-0001



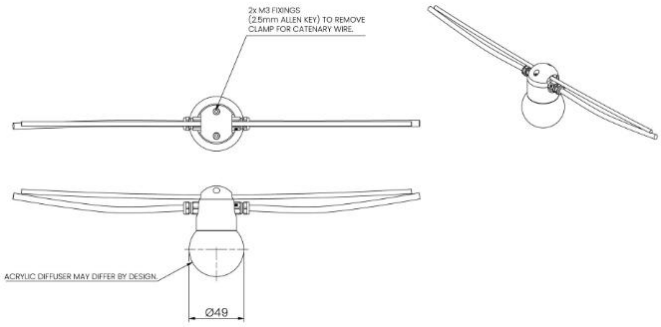

Miniature exterior catenary lighting system for enhancing outdoor spaces, pathways, terraces and intimate hospitality or high end residential environments.

Product Description


The Micro G-Cat is a compact IP66 rated exterior catenary lighting system, designed to deliver a refined decorative glow at a smaller scale. Developed as a more discreet companion to the successful Mini G-Cat, it offers elegant ambient illumination for outdoor applications where subtlety, atmosphere and visual comfort are key. Featuring a clear polished globe with an internally frosted diffuser, the Micro G-Cat creates a soft decorative presence while maintaining excellent durability for exterior use.

Key Features

• Sustainable construction: manufactured from recycled aluminium with durable anodised or powder coated finishes for long term exterior performance. Specialist finishes available on request.
• Decorative globe diffuser: clear polished globe with internally frosted finish for a soft, comfortable glow.
• Advanced dimming options: compatible with DALI, 0–10V, DMX and wireless dimming systems, with dimming down to 0.1%.
• High-quality light source: up to 95 CRI LED options for excellent colour rendition.
• Compact and discreet: smaller scale format ideal for more intimate architectural and landscape applications.
• Exterior rated: IP66 rated for reliable outdoor performance.





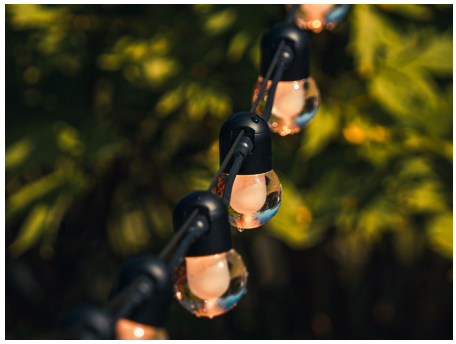

STOANE
LIGHTING

Micro G-Cat

STD-000618-0001

Compliance

UK CA CE

c ETL US LISTED
Intertek

STOANE LIGHTING

Micro G-Cat

STD-000618-0001

Technical

Supply	Remote constant current LED driver required
Light source	Extended Type S
Initial output	2W 2.9Vf at 700 mA **80CRI** 2200K • 150lm • 71lm/W **90CRI** 2400K • 210lm • 105lm/W **95CRI** 2700K • 167lm • 82lm/W 3000K • 177lm • 87lm/W 3500K • 187lm • 92lm/W 4000K • 197lm • 97lm/W
Light distribution	Decorative Globe 90.5°
Lumen maintenance	L70 B50 >66,000 hours
Colour consistency	2 SDCM
Colour maintenance	± 0.007 Δu'v'
IP rating	IP66
IK rating	IK10
Weight	0.2kg

STOANE
LIGHTING

Micro G-Cat

STD-000618-0001

Service Commitment



