STOANE
LIGHTING

# Micro G-Cat

STD-000618-0004

## Configured Product

CCT

3000K

Finish

Matt Black

Caterary Wire Diameter


4mm

STOANE LIGHTING

# Micro G-Cat

STD-000618-0004



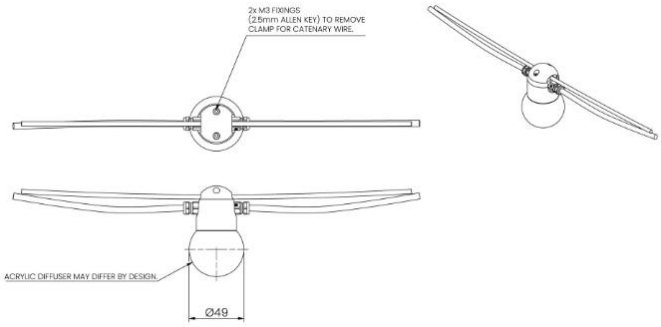


Miniature exterior catenary lighting system for enhancing outdoor spaces, pathways, terraces and intimate hospitality or high end residential environments.

**Product Description**


The Micro G-Cat is a compact IP66 rated exterior catenary lighting system, designed to deliver a refined decorative glow at a smaller scale. Developed as a more discreet companion to the successful Mini G-Cat, it offers elegant ambient illumination for outdoor applications where subtlety, atmosphere and visual comfort are key. Featuring a clear polished globe with an internally frosted diffuser, the Micro G-Cat creates a soft decorative presence while maintaining excellent durability for exterior use.

**Key Features**

• Sustainable construction: manufactured from recycled aluminium with durable anodised or powder coated finishes for long term exterior performance. Specialist finishes available on request.
• Decorative globe diffuser: clear polished globe with internally frosted finish for a soft, comfortable glow.
• Advanced dimming options: compatible with DALI, 0–10V, DMX and wireless dimming systems, with dimming down to 0.1%.
• High-quality light source: up to 95 CRI LED options for excellent colour rendition.
• Compact and discreet: smaller scale format ideal for more intimate architectural and landscape applications.
• Exterior rated: IP66 rated for reliable outdoor performance.





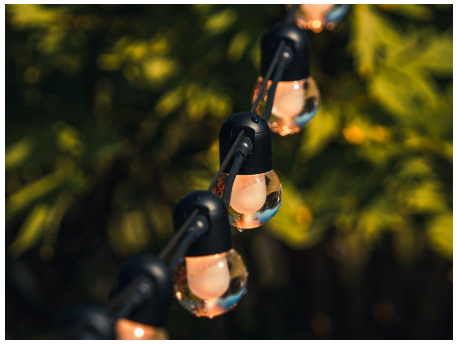

STOANE
LIGHTING

# Micro G-Cat

STD-000618-0004

## Compliance

UK CA CE

c ETL US LISTED
Intertek

STOANE LIGHTING

# Micro G-Cat

STD-000618-0004

## Technical

| | |
|---|---|
| **Supply** | Remote constant current LED driver required |
| **Light source** | Extended Type S |
| **Initial output** | 2W 2.9Vf at 700 mA<br><br>**80CRI**<br>2200K • 150lm • 71lm/W<br>**90CRI**<br>2400K • 210lm • 105lm/W<br>**95CRI**<br>2700K • 167lm • 82lm/W<br>3000K • 177lm • 87lm/W<br>3500K • 187lm • 92lm/W<br>4000K • 197lm • 97lm/W |
| **Light distribution** | Decorative Globe 90.5° |
| **Lumen maintenance** | L70 B50 >66,000 hours |
| **Colour consistency** | 2 SDCM |
| **Colour maintenance** | ± 0.007 Δu'v' |
| **IP rating** | IP66 |
| **IK rating** | IK10 |
| **Weight** | 0.2kg |

STOANE
LIGHTING

# Micro G-Cat

STD-000618-0004

## Service Commitment

