STOANE LIGHTING

EQUIPMENT DESIGN + MANUFACTURE

Pipien

STD-000146-0038

Configured Product

CCT

2700K

Beam

Flood 35.2°

Finish

TBC

Attachments

None

Cable Length

500mm

STOANE LIGHTING

EQUIPMENT DESIGN + MANUFACTURE

Pipien

STD-000146-0038

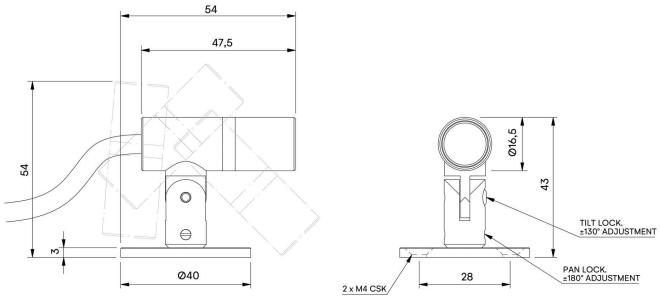

Award winning miniature exterior spotlight system, for surface mounting to illuminate exterior architectural details and landscape illumination. Read Pipien's professional review here.

Product Description

The Pipien is a miniature IP66 exterior rated, adjustable and lockable spotlight. Constructed from precision-machined recycled aluminium, the spotlight features an anodised and powder-coated finish for enhanced durability and aesthetics.

Key Features

• Sustainable construction: made from recycled aluminium with a weather resistant long-lasting anodised and powder-coated finish. Specialist finishes available on request.
• Fixed optics can be easily swapped from Very Narrow to Flood to elliptical beam options
• Snoot and Cowl options available.
• Spike mounted and tree strap options available.
• Advanced dimming options: DALI, 0-10V, DMX and Wireless dimming, down to 0.1%.
• High-performance lighting: up to 98 CRI LEDs with interchangeable optical systems.

STOANE LIGHTING

EQUIPMENT DESIGN + MANUFACTURE

Pipien

STD-000146-0038

Compliance

Technical

Supply	Remote constant current LED driver required
Light source	SL Type S
Initial output	**95 CRI** 1.4W 2.75Vf at 500mA 2700K · 139lm · 99lm/W 3000K · 148lm · 105lm/W 3500K · 158lm · 112lm/W 4000K · 169lm · 120lm/W
Light distribution	Medium 22.9° Flood 35.2° Wide Flood 50.7° Elliptical 21.7° x 33.3°
Lumen maintenance	L70 B50 >66,000 hours
Colour consistency	2 SDCM
Colour maintenance	± 0.007 Δu'v'
IP rating	IP66
Weight	0.075kg

STOANE LIGHTING

EQUIPMENT DESIGN + MANUFACTURE

Pipien

STD-000146-0038

Service Commitment