

ZTA.70.LV Track

STD-000582-0034

Configured Product

Light Source _____

SL90

Light Source Size _____

6mm LES

CCT _____

2700K

Beam _____

Flood 36.8°

Finish _____

Matt Black

Track adaptor colour _____

White

Dimming _____


DALI

Attachments _____

None

Secondary Lensing Accessories _____

Without accessories

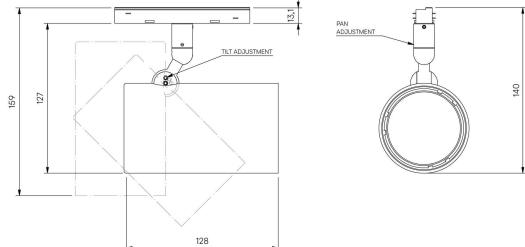

Modular high-performance, low voltage track-mounted spotlight system, for interior architectural applications such as Museums, Galleries, Retail and Workplace environments. Engineered for exceptional durability, maintainability, re-manufacturability, and recyclability, this spotlight sets a new standard for sustainable design.

Product Description

ZTA.70.LV Track is constructed from extruded and precision-machined recycled aluminium, the spotlight features an anodised and powder-coated finish for enhanced durability and aesthetics. Compatible with 48V Stucchi Multitsystem EVO track, this spotlight includes integral dimming control gear.

The spotlight can accommodate up to two lens accessories and multiple attachments, making it highly customisable for various lighting needs.

Key Features

- Sustainable construction: made from recycled aluminium with a long-lasting anodised and powder-coated finish. Specialist finishes available on request.
- Versatile adjustment: 360° pan rotation and 130° tilt with a lockable spot.
- Advanced dimming options: DALI, 0-10V, and Wireless dimming, down to 0.1%.
- High-performance lighting: up to 98 CRI LEDs with interchangeable optical systems.
- Customisable accessories: can house up to two lens accessories and various attachments.
- Ceiling mounting only: designed exclusively for ceiling installations.

Compliance



Technical

Supply	48V DC supply to Stucchi Multisystem EVO track		
Light source	6mm LES COB	9mm LES COB	14mm LES COB
Initial output	<p>SL90 8W 32Vf at 250mA 2700K • 1087lm • 136lm/W 3000K • 1133lm • 141lm/W 3500K • 1144lm • 143lm/W 4000K • 1175lm • 147lm/W</p> <p>SL98 8.6W 34.4Vf at 250mA 2700K • 863lm • 100lm/W 3000K • 923lm • 107lm/W 3500K • 923lm • 107lm/W 4000K • 974lm • 113lm/W</p>	<p>SL90 11.8W 33.8Vf at 350mA 2700K • 1822lm • 154lm/W 3000K • 1908lm • 161lm/W 3500K • 1929lm • 163lm/W 4000K • 1919lm • 162lm/W</p> <p>SL98 10.6W 30.4Vf at 350mA 2700K • 1205lm • 113lm/W 3000K • 1288lm • 121lm/W 3500K • 1313lm • 124lm/W 4000K • 1352lm • 127lm/W</p>	<p>SL90 20.9W 34.8Vf at 600mA 2700K • 3097lm • 148lm/W 3000K • 3243lm • 155lm/W 3500K • 3280lm • 157lm/W 4000K • 3261lm • 156lm/W</p> <p>SL98 23.5W 33.5Vf at 700mA 2700K • 2669lm • 114lm/W 3000K • 2852lm • 122lm/W 3500K • 2909lm • 124lm/W 4000K • 2973lm • 127lm/W</p>
Light distribution	Very Narrow 7.3° Very Narrow 29.6° Narrow 11° Medium 26.7° Flood 36.8° Wide Flood 55.4° Extra Wide Flood 85.4°	Very Narrow 11.1° Narrow 14.4° Narrow 215.1° Medium 25.1° Flood 35.1° Wide Flood 54.1° Extra Wide Flood 82.9°	Narrow 16.9° Narrow 21.4° Medium 22° Medium 24.7° Flood 32.4° Wide Flood 51.6° Extra Wide Flood 79.6°
Lumen maintenance	L90 B0 in excess of 94,000 hours		
Colour consistency	2 SDCM		
Colour maintenance	$\pm 0.007 \Delta u'v'$		
IP rating	IP20		
Weight	0.75kg		

STOANE LIGHTING

EQUIPMENT DESIGN + MANUFACTURE

ZTA.70.LV Track

STD-000582-0034

Service Commitment