

Pipien

STD-000146-0028

Configured Product

CCT _____

2700K

Beam _____

Medium 22.9°

Finish _____


Anodised Clear

Attachments _____

None

Cable Length _____

500mm

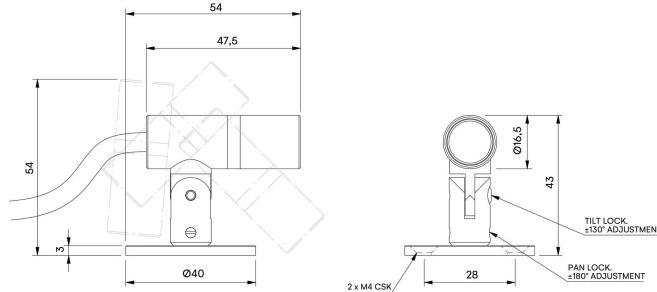

Award winning miniature exterior spotlight system, for surface mounting to illuminate exterior architectural details and landscape illumination. Read Pipien's professional review [here](#).

Product Description

The Pipien is a miniature IP66 exterior rated, adjustable and lockable spotlight. Constructed from precision-machined recycled aluminium, the spotlight features an anodised and powder-coated finish for enhanced durability and aesthetics.

Key Features

- Sustainable construction: made from recycled aluminium with a weather resistant long-lasting anodised and powder-coated finish. Specialist finishes available on request.
- Fixed optics can be easily swapped from Very Narrow to Flood to elliptical beam options
- Snoot and Cowl options available.
- Spike mounted and tree strap options available.
- Advanced dimming options: DALI, 0-10V, DMX and Wireless dimming, down to 0.1%.
- High-performance lighting: up to 98 CRI LEDs with interchangeable optical systems.



Compliance



Technical

Supply Remote constant current LED driver required

Light source SL Type S

Initial output 95 CRI 1.4W 2.75Vf at
500mA

2700K • 139lm • 99lm/W
3000K • 148lm • 105lm/W
3500K • 158lm • 112lm/W
4000K • 169lm • 120lm/W

Light distribution Medium 22.9°
Flood 35.2°
Wide Flood 50.7°
Elliptical 21.7° x 33.3°

Lumen maintenance L70 B50 >66,000 hours

Colour consistency 2 SDCM

Colour maintenance $\pm 0.007 \Delta u'v'$

IP rating IP66

Weight 0.075kg

STOANE LIGHTING

EQUIPMENT DESIGN + MANUFACTURE

Pipien

STD-000146-0028

Service Commitment

