STOANE
LIGHTING

# Module Star

STD-000019-0057

## Configured Product

CCT

3000K

Beam

TBC

Finish

Custom Painted

Mounting Method


Mounting TBC

STOANE LIGHTING

# Module Star

STD-000019-0057



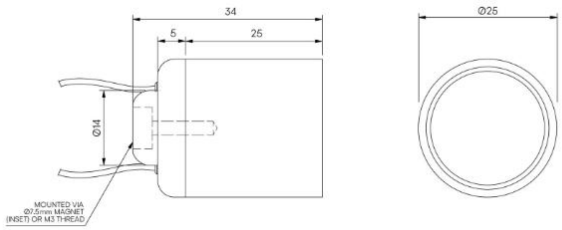


Compact recessed fixed focus module, for enhancing both interior and exterior architectural details. Capable of recessing into walls, ceilings and furniture.

**Product Description**

The Module Star is an IP66 rated fixed module, suitable for recessing into walls, ceiling or furniture, it can also be integrated into various architectural and lighting details via an M3 Stud or magnet.

**Key Features**

• Sustainable construction: made from recycled aluminium with a long-lasting anodised finish. Specialist finishes available on request. Includes toughened glass lens.
• Interchangeable optics to allow Narrow to Wide Flood to elliptical beam options.
• Advanced dimming options: DALI, 0-10V, and Wireless dimming, down to 0.1%.
• High-performance lighting: up to 97 CRI LEDs.



## Compliance

STOANE LIGHTING

# Module Star

STD-000019-0057

## Technical

| | |
|---|---|
| **Supply** | Remote constant current LED driver required |
| **Light source** | SL Star |
| **Initial output** | 2W 2.9Vf at 700mA<br><br>**80CRI**<br>2200K • 150lm • 71lm/W<br>**90CRI**<br>2400K • 210lm • 105lm/W<br>**95CRI**<br>2700K • 167lm • 82lm/W<br>3000K • 177lm • 87lm/W<br>3500K • 187lm • 92lm/W<br>4000K • 197lm • 97lm/W |
| **Light distribution** | Very Narrow 8.9°<br>Narrow 11.7°<br>Medium 16.7°<br>Flood 34.4°<br>Wide Flood 66.4°<br>Elliptical 11.6° x 47° |
| **Lumen maintenance** | L70 B50 >66,000 hours |
| **Colour consistency** | 2 SDCM |
| **Colour maintenance** | ± 0.007 Δu'v' |
| **IP rating** | IP66 |
| **Weight** | 0.04kg |

STOANE
LIGHTING

# Module Star

STD-000019-0057

---

## Service Commitment

