STOANE LIGHTING

EQUIPMENT DESIGN + MANUFACTURE

# Mini Module

STD-000037-0034

## Configured Product

CCT

2700K

Beam

Flood 36.7°

Finish

Anodised Black

Mounting Method

Stud Fixing

**STOANE** LIGHTING

EQUIPMENT DESIGN + MANUFACTURE

# Mini Module

STD-000037-0034

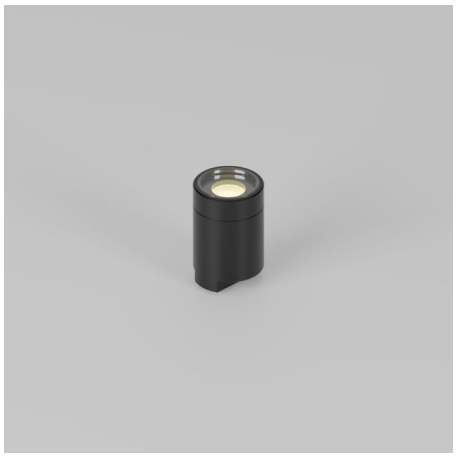

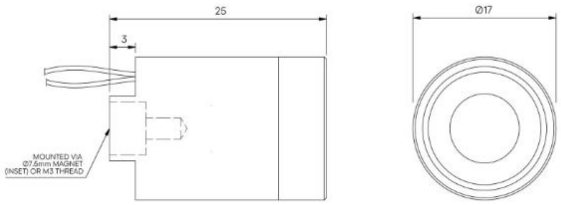


Miniature recessed fixed focus module, for enhancing both interior and exterior architectural details. Capable of recessing into walls, ceilings and furniture.

**Product Description**

The Mini Module is a miniature IP65 rated fixed module, suitable for recessing into walls, ceiling or furniture, it can also be integrated into various architectural and lighting details via an M3 Stud or magnet.

**Key Features**

• Sustainable Construction: Made from recycled aluminium with a long-lasting anodised finish. Specialist finishes available on request. Includes toughened glass lens.
• Interchangeable optics to allow Medium to Wide Flood to elliptical beam options.
• Advanced Dimming Options: DALI, 0-10V, and Wireless dimming, down to 0.1%.
• High-Performance Lighting: Up to 97 CRI LEDs.

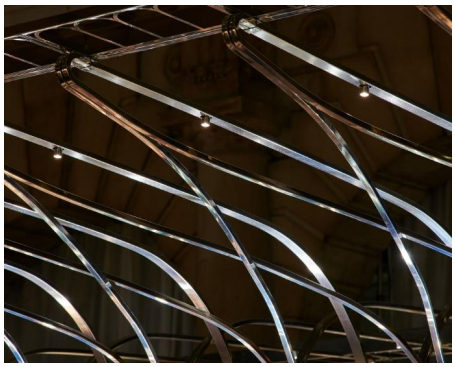

**STOANE** LIGHTING

EQUIPMENT DESIGN + MANUFACTURE

# Mini Module

STD-000037-0034

## Compliance

## Technical

| | |
|---|---|
| **Supply** | Remote constant current LED driver required |
| **Light source** | SL Type S |
| **Initial output** | **95 CRI** 1.4W 2.8Vf at 500mA<br><br>2700K · 125lm · 88lm/W<br>3000K · 133lm · 94lm/W<br>3500K · 140lm · 99lm/W<br>4000K · 148lm · 104lm/W |
| **Light distribution** | Medium 18.5°<br>Flood 36.7°<br>Wide Flood 54.1°<br>Elliptical 17.1° x 34.5° |
| **Lumen maintenance** | L70 B50 >66,000 hours |
| **Colour consistency** | 2 SDCM |
| **Colour maintenance** | ± 0.007 Δu'v' |
| **IP rating** | IP65 |
| **Weight** | 0.02kg |

**STOANE** LIGHTING

EQUIPMENT DESIGN + MANUFACTURE

# Mini Module

STD-000037-0034

---

## Service Commitment