STOANE LIGHTING

EQUIPMENT DESIGN + MANUFACTURE

Iris Type S

STD-000071-0035

Configured Product

CCT

2700K

Beam

Medium 22.9°

Finish

Anodised Black

Attachments

Slash Cut Snoot

Mounting Method

Spring Clip

STOANE LIGHTING

EQUIPMENT DESIGN + MANUFACTURE

Iris Type S

STD-000071-0035

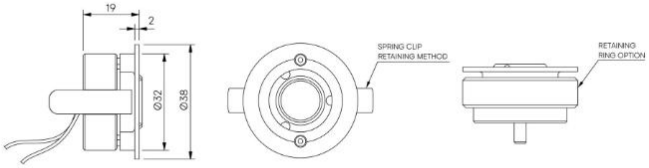

Miniature adjustable recessed lighting fixture for Museum, Gallery and Retail displays.

Product Description
The Iris Type S is an IP65 rated adjustable compact recessed and highly efficient fixture designed to provide precise illumination for Museum, Gallery and Retail applications. Iris Type S is suitable where an airtight seal is required.

Key Features
• Sustainable construction: made from recycled aluminium with a long-lasting anodised finish. Specialist finishes available on request.
• Fixed optics can be easily swapped for multiple beam options
• Snoot and Cowl options available.
• Advanced dimming options: DALI, 0-10V, DMX and Wireless dimming, down to 0.1%.
• High-performance lighting: up to 97 CRI LEDs

Compliance

UK CA CE

C ETL US Intertek

STOANE LIGHTING

EQUIPMENT DESIGN + MANUFACTURE

Iris Type S

STD-000071-0035

Technical

Supply	Remote constant current LED driver required
Light source	SL Type S
Initial output	**95 CRI** 1.4W 2.75Vf at 500mA 2700K • 139lm • 99lm/W 3000K • 148lm • 105lm/W 3500K • 158lm • 112lm/W 4000K • 169lm • 120lm/W
Light distribution	Medium 22.9° Flood 35.2° Wide Flood 50.7° Elliptical 21.7° x 33.3°
Lumen maintenance	L70 B50 >66,000 hours
Colour consistency	2 SDCM
Colour maintenance	± 0.007 Δu'v'
IP rating	IP66
Weight	0.041kg

Service Commitment

ReNew

5 Year Warranty
25 Year Duty of Care