

# STOANE LIGHTING

EQUIPMENT DESIGN + MANUFACTURE

## Bulwark

STD-000076-0004



### Configured Product

CCT \_\_\_\_\_

2700K
-------

Finish \_\_\_\_\_

TBC
-----

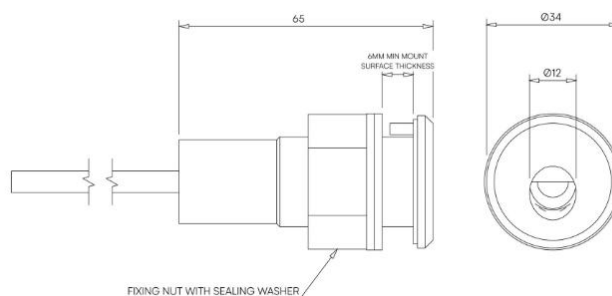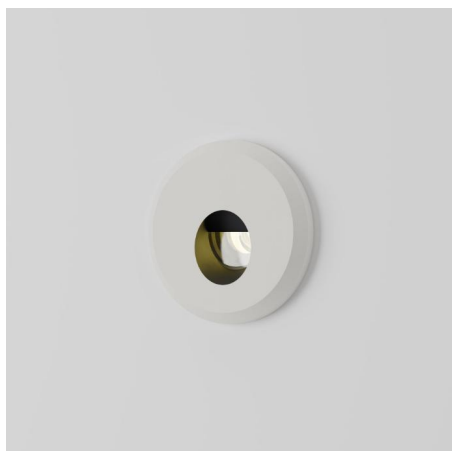

Exterior recessed wall light, for enhancing pathways, stairs and decks.

## Product Description

The Bulwark is a Marine Grade miniature IP66 rated exterior recessed wall light, designed to provide a low level soft directional light to pathways, stairs and ship decks.

Including glare baffle to avoid upward light spill.

Supplied with install sleeve and snap-on stainless steel bezel. Including an acetal mounting sleeve.

## Key Features

- Sustainable construction: made from Stainless Steel, recycled aluminium with a weather resistant long-lasting anodised and powder-coated finish. Specialist finishes available on request.
- Fixed focus optic with soft asymmetric light distribution and glare baffle.
- Advanced dimming options: DALI, 0-10V, DMX and Wireless dimming, down to 0.1%.
- High-performance lighting: up to 97 CRI LEDs.
- First fix acetal installation sleeve

## Compliance



## Technical

Supply Remote constant current LED driver required

Light source SL Type S

Initial output 95 CRI 1.4W 2.75Vf at  
500mA  
  
2700K · 139lm · 99lm/W  
3000K · 148lm · 105lm/W  
3500K · 158lm · 112lm/W  
4000K · 169lm · 120lm/W

Light distribution Asymmetrical 52.3° x 56.3°

Lumen maintenance L70 B50 >66,000 hours

Colour consistency 2 SDCM

Colour maintenance  $\pm 0.007 \Delta u'v'$

IP rating IP66

IK rating IK10

Weight 0.147kg

---

## Service Commitment

