

## Pipien

STD-000146-0016

### Configured Product

CCT \_\_\_\_\_

2700K

Beam \_\_\_\_\_

TBC

Finish \_\_\_\_\_


TBC

Attachments \_\_\_\_\_

None

Cable Length \_\_\_\_\_

500mm

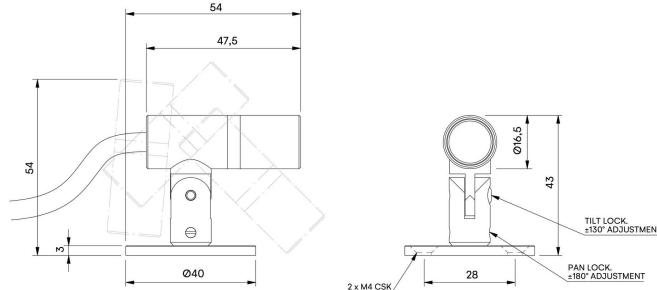

Award winning miniature exterior spotlight system, for surface mounting to illuminate exterior architectural details and landscape illumination. Read Pipien's professional review [here](#).

### Product Description

The Pipien is a miniature IP66 exterior rated, adjustable and lockable spotlight. Constructed from precision-machined recycled aluminium, the spotlight features an anodised and powder-coated finish for enhanced durability and aesthetics.

### Key Features

- Sustainable construction: made from recycled aluminium with a weather resistant long-lasting anodised and powder-coated finish. Specialist finishes available on request.
- Fixed optics can be easily swapped from Very Narrow to Flood to elliptical beam options
- Snoot and Cowl options available.
- Spike mounted and tree strap options available.
- Advanced dimming options: DALI, 0-10V, DMX and Wireless dimming, down to 0.1%.
- High-performance lighting: up to 98 CRI LEDs with interchangeable optical systems.



## Compliance



## Technical

**Supply** Remote constant current LED driver required

**Light source** SL Type S

**Initial output** 95 CRI 1.4W 2.75Vf at  
500mA

2700K • 139lm • 99lm/W  
3000K • 148lm • 105lm/W  
3500K • 158lm • 112lm/W  
4000K • 169lm • 120lm/W

**Light distribution** Medium 22.9°  
Flood 35.2°  
Wide Flood 50.7°  
Elliptical 21.7° x 33.3°

**Lumen maintenance** L70 B50 >66,000 hours

**Colour consistency** 2 SDCM

**Colour maintenance**  $\pm 0.007 \Delta u'v'$

**IP rating** IP66

**Weight** 0.075kg

**STOANE LIGHTING**

EQUIPMENT DESIGN + MANUFACTURE

Pipien

STD-000146-0016

---

## Service Commitment

