STOANE
LIGHTING

# Surf Type G

STD-000296-0189

## Configured Product

CCT

2700K

Beam

Elliptical 12° x 46.2°

Finish

Custom Painted

Attachments

None

Cable route

Through Base

Secondary Lensing Accessories


Without accessories

STOANE LIGHTING

# Surf Type G

STD-000296-0189



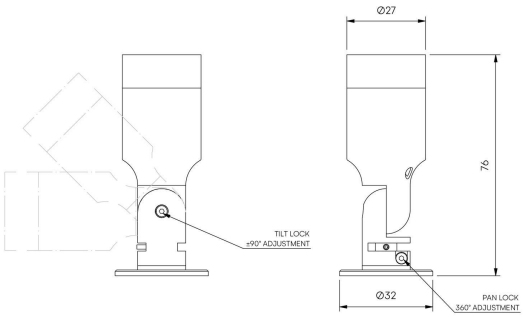



Compact lighting system for Museum, Gallery and Retail displays.

**Product Description**
The Surf Type G is a compact adjustable and highly efficient miniature fixture designed to provide precise illumination for Museum, Gallery and Retail applications. With both pan and tilt locking mechanisms.
Constructed from precision-machined recycled aluminium, the system features an anodised finish for enhanced durability and aesthetics.

**Key Features**
• Sustainable construction: made from recycled aluminium with a long-lasting anodised finish. Specialist finishes available on request.
• Tree system height and number of plug in points can be specified.
• Fixed interchangeable optics available ranging from Very narrow to Wide Flood to elliptical beam options.
• Lockable Tilt and Pan mechanisms.
• Advanced dimming options: DALI, 0-10V, DMX and Wireless dimming, down to 0.1%.
• High-performance lighting: Up to 97 CRI LEDs



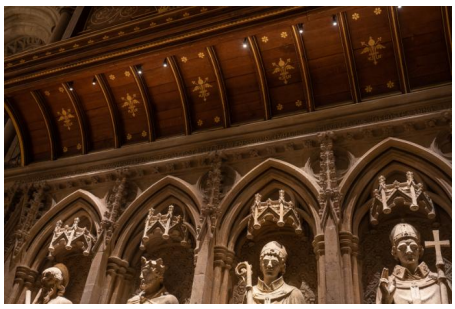

STOANE
LIGHTING

# Surf Type G

STD-000296-0189

## Compliance

UK CA CE

c ETL US LISTED
Intertek

STOANE LIGHTING

# Surf Type G

STD-000296-0189

## Technical

| | |
|---|---|
| **Supply** | Remote constant current LED driver required |
| **Light source** | SL Star |
| **Initial output** | 3.1W 3Vf at 1050mA<br><br>**80 CRI**<br>2200K • 199lm • 60lm/W<br>**90 CRI**<br>2400K • 290lm • 97lm/W<br>**95 CRI**<br>2700K • 232lm • 73lm/W<br>3000K • 246lm • 78lm/W<br>3500K • 260lm • 82lm/W<br>4000K • 274lm • 87lm/W |
| **Light distribution** | Very Narrow 8.6°<br>Narrow 12.1°<br>Medium 15.7°<br>Flood 28.7°<br>Wide Flood 51.3°<br>Elliptical 12° x 46.2° |
| **Lumen maintenance** | L70 B50 >66,000 hours |
| **Colour consistency** | 2 SDCM |
| **Colour maintenance** | ± 0.007 Δu'v' |
| **IP rating** | IP20 |
| **Weight** | 0.07kg |

STOANE
LIGHTING

# Surf Type G

STD-000296-0189

---

## Service Commitment

