STOANE LIGHTING

EQUIPMENT DESIGN + MANUFACTURE

# Amanita

STD-000409-0048

## Configured Product

CCT

3000K

Finish

Matt Black

Mounting Method

Mount Disc (buried)

Cable Length

500mm

Stem Height

750mm

**STOANE** LIGHTING

EQUIPMENT DESIGN + MANUFACTURE

# Amanita

STD-000409-0048

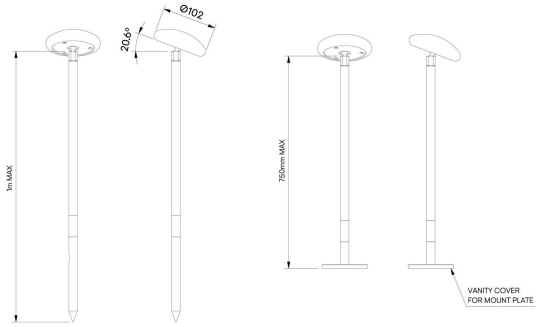


Exterior landscape accent lighting system, designed for both soft and hard landscaping applications, it can be used both in ground and on tabletops.

**Product Description**

The Amanita is a small form factor IP66 rated exterior accent light, designed to provide a soft, low level, 360° lighting distribution via a customised impact resistant frosted diffuser.
When orientated directly downwards the product provides a **BUG rating** of B0 U0 G0.
Providing up to 20.6° of lockable tilt adjustment and both spike and fixed mount plates available.

**Key Features**

- Sustainable construction: made from recycled aluminium with a weather resistant long-lasting anodised and powder-coated finish. Specialist finishes available on request.
- Versatile adjustment providing up to 20.6° of tilt with locking mechanism.
- Advanced dimming options: DALI, 0-10V, and Wireless dimming, down to 0.1%.
- High-performance lighting: Up to 97 CRI LEDs.
- Special SPD LEDs available on request.
- Ground spike and fixed mount plate options available for soft and hard landscaping applications.

## Compliance

UK CA CE

**STOANE** LIGHTING

EQUIPMENT DESIGN + MANUFACTURE

# Amanita

STD-000409-0048

## Technical

| | |
|---|---|
| **Supply** | Remote constant current LED driver required |
| **Light source** | SL Star |
| **Initial output** | **95 CRI** 6W 8.4Vf at 700mA<br>2700K · 537lm · 90lm/W<br>3000K · 576lm · 96lm/W<br>3500K · 612lm · 102lm/W<br>4000K · 657lm · 110lm/W |
| **Light distribution** | Downward 96.2° |
| **Lumen maintenance** | L70 B50 >66,000 hours |
| **Colour consistency** | 2 SDCM |
| **Colour maintenance** | ± 0.007 Δu'v' |
| **IP rating** | IP66 |
| **Weight** | 0.65kg |

---

## Service Commitment

ReNew

5 Year Warranty
25 Year Duty of Care