

ZTA.50.LV Track.Wall Wash

STD-000561-0004

Configured Product

Light Source

SL98

Light Source Size

9mm LES

CCT

4000K

Finish

Matt Black

Track adaptor colour

Black

Dimming


DALI

Attachments

None

Secondary Lensing Accessories

Without accessories

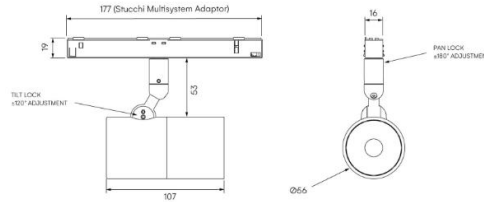

Modular high-performance, low voltage track-mounted spotlight system, for interior architectural applications such as Museums, Galleries, Retail and Workplace environments.

Engineered for exceptional durability, maintainability, re-manufacturability, and recyclability, this spotlight sets a new standard for sustainable design.

Product Description

ZTA.50.LV Track.Wall Wash is constructed from extruded and precision-machined recycled aluminium, the spotlight features an anodised and powder-coated finish for enhanced durability and aesthetics. Easily interchangeable between Zoom, Fixed optic and Framing projector options.

Key Features

- Sustainable construction: made from recycled aluminium with a long-lasting anodised and powder-coated finish. Specialist finishes available on request.
- Fixed optics can be easily swapped to Zoom, Wall Wash and additional framer attachments.
- Versatile adjustment: 363° pan rotation and 130° tilt with a lockable spot.
- Advanced dimming options: DALI, 0-10V, and Wireless dimming, down to 0.1%.
- High-performance lighting: up to 98 CRI LEDs with interchangeable optical systems.
- Customisable accessories: can house up to two lens accessories and various attachments.
- Ceiling mounting only: designed exclusively for ceiling installations.

Compliance



Technical

Supply 48V supply to Stucchi Multisystem EVO track

Light source 9mm LES COB

Initial output **SL90** 11.8W 33.8Vf at 350mA

2700K · 1822lm · 154lm/W

3000K · 1908lm · 161lm/W

3500K · 1929lm · 163lm/W

4000K · 1919lm · 162lm/W

SL98 10.6W 30.4Vf at

350mA

2700K · 1205lm · 113lm/W

3000K · 1288lm · 121lm/W

3500K · 1313lm · 124lm/W

4000K · 1352lm · 127lm/W

Light distribution Wall Wash 75.6° x 30.5°

Lumen maintenance L90 B0 in excess of 94,000 hours

Colour consistency 2 SDCM

IP rating IP20

Weight 0.38kg

Service Commitment

