STOANE
LIGHTING

ZTA.50.Bay

STD-000564-0053

Configured Product

Light Source

SL90

Light Source Size

6mm LES

CCT

2700K

Beam

Very Narrow 13.9°

Finish

Matt Black

Dimming

Driver specific

Cable Length

500mm

Secondary Lensing Accessories


With accessories

STOANE LIGHTING

ZTA.50.Bay

STD-000564-0053



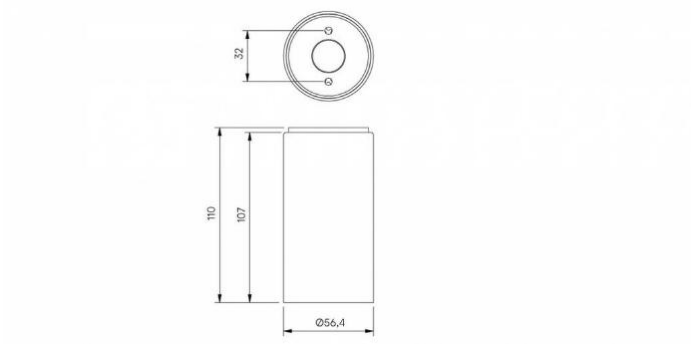

Modular high-performance, ceiling mounted spotlight system, for interior architectural applications such as Museums, Galleries, Retail and Workplace environments. Engineered for exceptional durability, maintainability, re-manufacturability, and recyclability, this spotlight sets a new standard for sustainable design.

Product Description

ZTA.50.Bay is constructed from extruded and precision-machined recycled aluminium, the spotlight features an anodised and powder-coated finish for enhanced durability and aesthetics.

Key Features

• Sustainable construction: made from recycled aluminium with a long-lasting anodised and powder-coated finish. Specialist finishes available on request.
• High-performance lighting: up to 98 CRI LEDs with interchangeable optical systems.
• Customisable accessories: can house up to two lens accessories and various attachments.
• Advanced dimming options: DALI, 0-10V, DMX and Wireless dimming, down to 0.1%.







STOANE
LIGHTING

ZTA.50.Bay

STD-000564-0053

Compliance

STOANE LIGHTING

ZTA.50.Bay

STD-000564-0053

Technical

Supply	Remote constant current LED driver required	
Light source	6mm LES COB	9mm LES COB
Initial output	**SL90** 8W 32Vf at 250mA	**SL90** 11.8W 33.8Vf at 350mA
	2700K • 1087lm • 136lm/W 3000K • 1133lm • 141lm/W 3500K • 1144lm • 143lm/W 4000K • 1175lm • 147lm/W	2700K • 1822lm • 154lm/W 3000K • 1908lm • 161lm/W 3500K • 1929lm • 163lm/W 4000K • 1919lm • 162lm/W
	SL98 8.6W 34.4Vf at 250mA	**SL98** 10.6W 30.4Vf at 350mA
	2400K • 733lm • 85lm/W 2700K • 863lm • 100lm/W 3000K • 923lm • 107lm/W 3500K • 923lm • 107lm/W 4000K • 974lm • 113lm/W	2400K • 1085lm • 102lm/W 2700K • 1205lm • 113lm/W 3000K • 1288lm • 121lm/W 3500K • 1313lm • 124lm/W 4000K • 1352lm • 127lm/W
Light distribution	Very Narrow 13.9° Narrow 14.7° Medium 24.1° Flood 36.7° Wide Flood 51.7°	Narrow 17.4° Narrow 2 18.8° Medium 25.3° Flood 34.1° Wide Flood 46.6°
Lumen maintenance	L90 B0 in excess of 94,000 hours	
Colour consistency	2 SDCM	
IP rating	IP20	
Weight	0.31kg	

STOANE
LIGHTING

ZTA.50.Bay

STD-000564-0053

Service Commitment



